



Sermovil Automoción, S.L. Sertronic group


C/ Santiago Rusinyol, 14 NAVE A9 Pol. Ind. Can Humet de Dalt

08130 – Polinya BARCELONA - SPAIN

www.sertronic.es Tel. +34 937133730 sermovil@sertronic.es


Doc. FH2

FICHA TÉCNICA FUSIBLE Normal

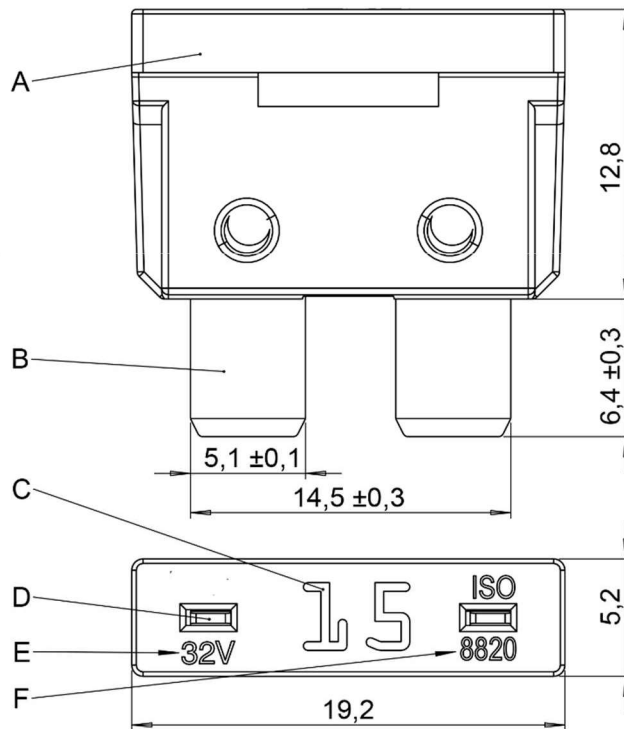

- A Insulating grip see chart for color
B Terminal male 99,995% zinc
C Nominal current OCR-A font
D Test points
E Nominal voltage inmoulded
F ISO standard inmoulded

ref.	RATING [A]	COLOR	PLASTIC	OCR FONT	FORM
1A	1	Black	PC	1	E *
2A	2	Grey	PC	2	E
3A	3	Violet	PC	3	S
4A	4	Pink	PC	4	S
5A	5	Tan	PC	5	S
75A	7,5	Brown	PC	7.5	S
10A	10	Red	PC	10	S
15A	15	Blue	PC	15	Ω
20A	20	Yellow	PC	20	Ω
25A	25	Natural	PC	25	Ω
30A	30	Green	PC	30	Ω
35A	35	Dark green	PC	35	Ω
40A	40	Orange	PC	40	Ω

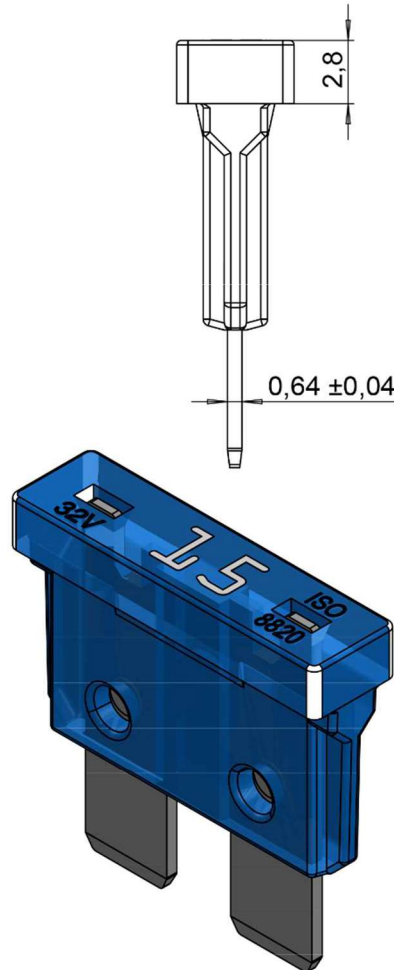

* ISO 8820-3, 135% load not applicable for this rating

FUSING TIME DIN 72581-3 ISO 8820-3		
LOAD [%]	MIN [s]	MAX [s]
110	360.000	-
135	0,75	600
160	0,25	50
200	0,15	5
350	0,04	0,5
600	0,02	0,1

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES: 0,2
LINEAR:
ANGULAR:

FINISH:

DEBUR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

	NAME	SIGNATURE	DATE
DRAWN	B.D.		12.2019
CHK'D			
APP'V'D			
MFG			
Q.A			

MATERIAL:

WEIGHT: 1,42g

TITLE:

NORM OCR fuses family

DWG NO.

XXA

A4

SCALE:4:1

SHEET 1 OF 1